




 $4x \emptyset 5.0$ throughhole or 4x M4 thread

fixation with ISO14583 or similar

max. head dia.: 8.0, max. head height: 5.0 min. screw length: 16.0 + panel thickness

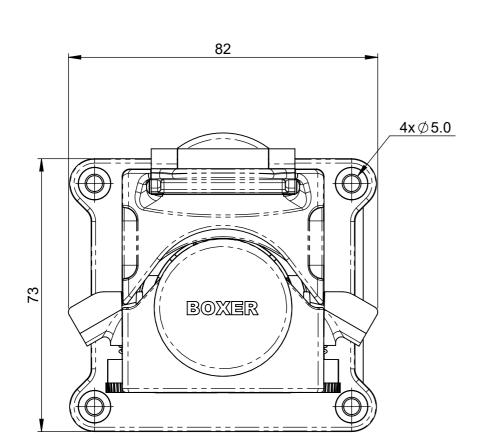

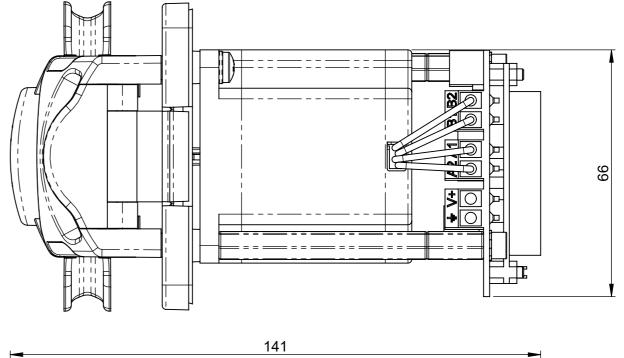

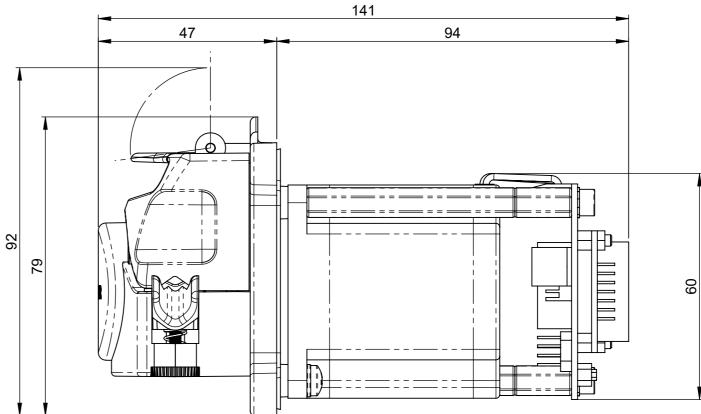

Part Numbers:

1 5 9 0 [X].1 0 5

Number of Rollers

- 1: 3 Rollers
- 2: 4 Rollers
- 3: 6 Rollers

DIMENSIONS STATED IN MM

BOXER					Surface Quality	Default Tolerances ISO 2768-mK	different materials, mainly black	
Marktplatz 9 ■ 87724 Ottobeuren ■ Germany					Part Number	Part Name		Format
Rev.	Date (D.M.Y.)	CRE	CHE	APP	1590[X].105	15KS+ /W NEW	I5KS+ /w NEMA23, iD Driver	
04					1000[7].100	TOROT /W INCINIAZO, ID DITVEI		Scale
03					Tool Number	1:1		
02					Assembly	15KS+		Sheet
01					/ 10001111011	1.0.10		
00 25.03.2025 RZe SCo SSp File Name: 15KS Assy							── 1 of 1	