


recommended panel cut-out:

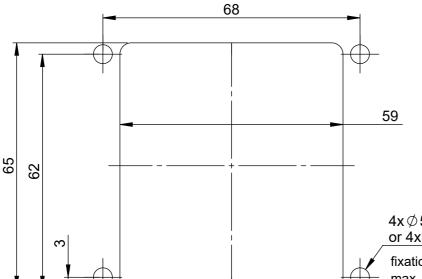


4x Ø 5.0 throughhole or 4xM4 thread

fixation with ISO14583 or similar max. head dia.: 8.0, max. head height: 5.0 min. screw length: 16.0 + panel thickness

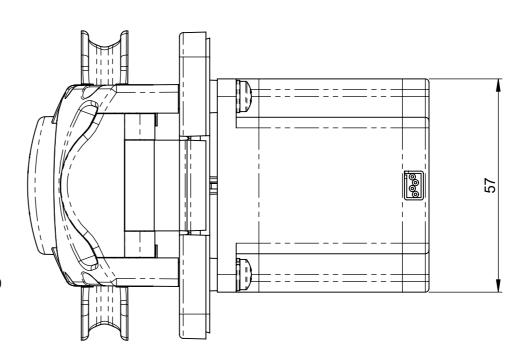

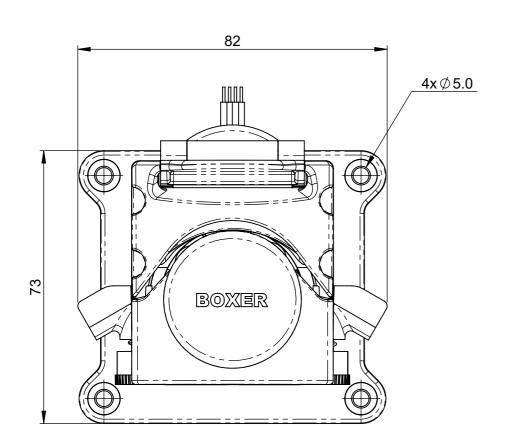

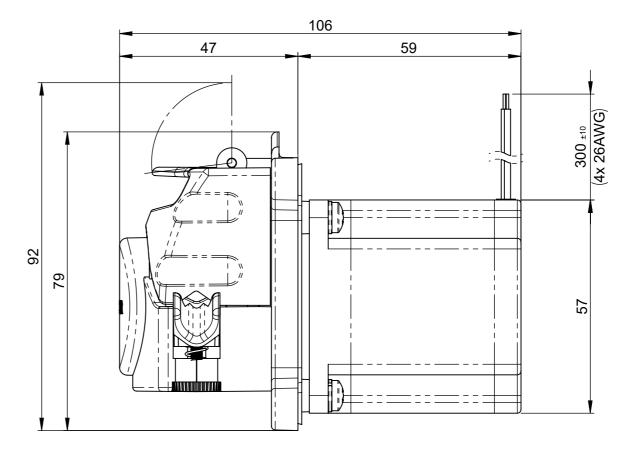

Part Numbers:

1 5 9 0 [X].9 0 0

Number of Rollers 2: 4 Rollers

3: 6 Rollers

DIMENSIONS STATED IN MM

BOXER					Surface Quality	Default Tolerances ISO 2768-mK	different materials, mainly black	
Marktplatz 9 ■ 87724 Ottobeuren ■ Germany					Part Number	Part Name		Format
Rev.	Date (D.M.Y.)	CRE	CHE	APP	1590[x].900	15QQ+ /w NE	A3	
04					1000[//].000	1000 /11 1121111 120		Scale
03					Tool Number	Project		1:1
02					Assembly			
01					/ tocombiy	15QQ		Sheet
00	25.03.2025	RZe	SCo	SSp	File Name: 15QQ_Assy	1 of 1		