11K Series - BLDC Motor

EN | DE | CN | FR | ES



Boxer Pumps > Products > Diaphragm Pump

11K diaphragm pump with BLDC motor and integrated driver.



Technical Data

Free Flow	1.8 l/min
Max Pressure	+500 mbar
Max Vacuum	-450 mbar
Voltage Options	12 to 24 V DC
Max Current (start-up or locked rotor), electronically limited	1.5 A
Power Consumption	1.56 to 2.88 W
Speed	500 to 5000 rpm
Wiring Details / Speed Control	Page 2
Wire Length	400 mm (5 mm stripped / tinned)
Wire Gauge	26 AWG
Max. Motor Surface Temperature	90 °C
Motor Insulation Class	В
Max Ambient Operating Temperature	50 °C
Max Media Temperature	100 °C
Elastomers:	
Diaphragm	EPDM
Valves	EPDM
Gasket	EPDM
Eccentric	1.30 mm
Other Wetted Parts	PBT (Polybutylene terephthalate)
Weight	72 g
	Bold indicates configuration applicable to this datasheet



Boxer Pumps > Products > Diaphragm Pump

Wiring Details / Speed Control

Wire:		
1	Red	12 to 24 V DC
2	Black	GND
3	Green	Speed control input: 0 to 5V DC (or PWM with min. 15 kHz signal)
		Speed: 500 to 5000 rpm
		Resolution: 10 Bit (1024 steps)
4	White *	+ 5 V DC output (for use with speed control, see below)
5	Yellow	Frequency output, 1 pulse (+ 5 V) per revolution with 50% on time
		* White wire is supplied insulated. Damage will occur if connected to GND or any voltage.


The 11K BLDC diaphragm pump has 3 options for speed control:

1 Full Speed: white + 5 V DC output connected directly to green speed input.

White / 5 V Output

Green / Speed Input

2 Variable Speed: external 10 k Ω pot connected between white + 5V DC output and GND with wiper connected to green speed input.




3 Variable Speed: green speed input connected directly to an external 0 to 5 V DC (or PWM) signal with common GND to motor.

Green / Speed Input ——
Black / GND ——

Flow Curve

At max speed (speed input at 5 V DC / 5000 rpm), power supply 12 to 24 V DC.

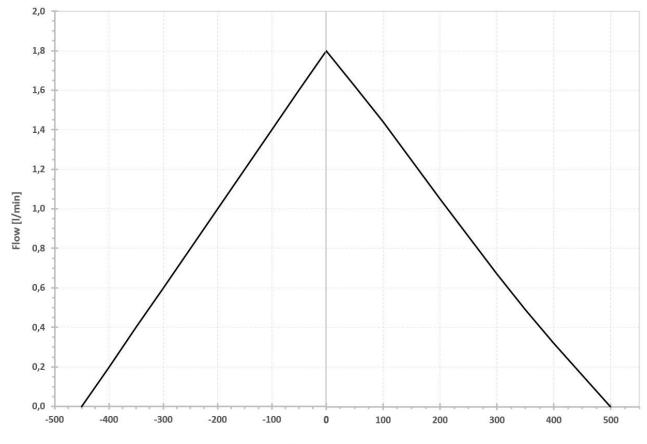


Diff. Pressure [mbar]



Boxer Pumps > Products > Diaphragm Pump

Drawing

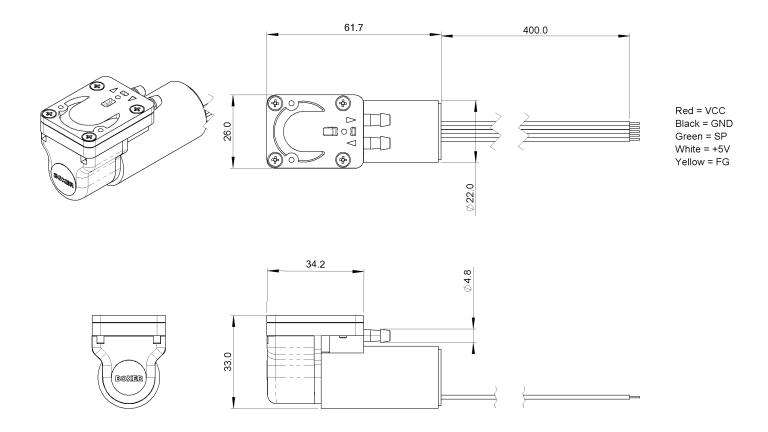

Links to Drawing and STEP file: $\rightarrow \underline{\text{Drawing}} \text{ (.png)}$ $\rightarrow \underline{\text{STEP}} \text{ (.zip)}$

Order Information

Part Number Description

1100.610 11K 12 to 24 V BLDC

Please enquire for part numbers of other configurations.

BOX-it (Webshop for online purchase)

Sample quantities are available for direct online purchase:



→ BOX-it

Additional Information (Links):

 \rightarrow 11K Webpage

All data is representative for initial selection purposes. It is the responsibility of the user to determine suitability for the intended use. Technical changes reserved.

BOXER

info@boxerpumps.com www.boxerpumps.com